


# First 44.7

## Standard equipment & options

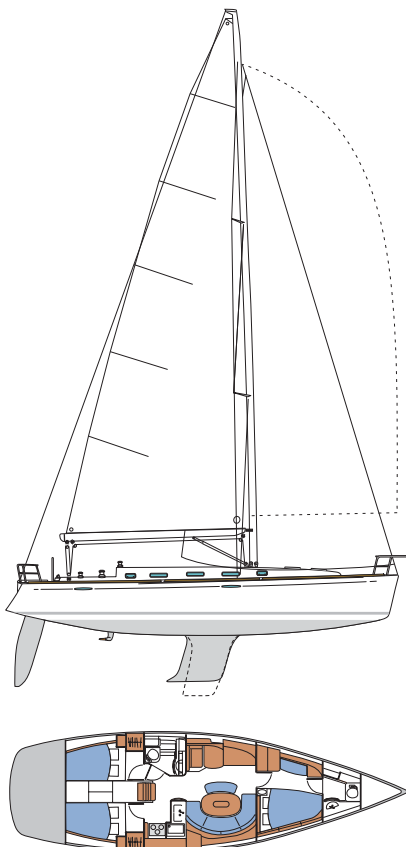

LOA.....	44'11"
Hull Length.....	43'9"
LWL.....	37'8"
Beam.....	13'0"
Displacement.....	21,572 lbs (approx)
Standard Sail Area.....	TBD
Draft.....(standard) 6'10"....(optional) 8'6"	
Ballast (standard).....	7,518 lbs
Ballast (optional).....	8,047 lbs
Fuel Capacity.....	53 gal
Water.....	106 gal
Auxiliary.....	54 hp
Hull Design: Farr Yacht Design	

Rig Dimensions: Mast...Classic Racing

I.....	57'5"	57'5"
J.....	15'9"	15'9"
P.....	56'8"	56'8"
E.....	20'5"	20'5"

### CONSTRUCTION

**HULL:** Solid fiberglass/GRP with structural hull liner, laminated for load bearing and distribution.

**DECK:** fiberglass/GRP balsa sandwich for rigidity reinforced with unidirectional rovings, weight saving, insulation and soundproofing.

**INTERIOR WOOD:** Beechwood stained finish.

All bulkheads bonded 360 degrees to hull and deck for structural strength  
Epoxy/fiber rudder and stock.

### ON DECK

SS stemhead fitting with roller  
Self-bailing anchor locker with windlass support  
800w electrical windlass  
SS bow pulpit w/navigation lights  
Varnished wood toe rail along the hull-deck junction  
(8) aluminum mooring cleats  
SS stanchions w/semirecessed bases  
Double set of stainless lifelines  
(1) Lewmar® Racing mainsheet traveller track w/ball-bearing car adjustable under tension  
(2) Lewmar Racing genoa sheet tracks adjustable under tension  
Mainsail tackle with ball-bearing blocks  
(2) Harken® 44.2ST maneuvering winches on coachroof  
(2) Harken 52.2ST genoa sheet winches  
Spinlock® XT deck stoppers  
Wichard® foldaway paddeyes for spinnaker blocks  
(2) semi-recessed shroud chainplates  
Lewmar Y-Spoke black anodized alum. wheel (1.70 m dia.)  
Self-aligning upper and lower rudder bearings  
Teak helmsman seat  
Teak-slatted cockpit seats  
(3) Storage lockers  
Locker for gas bottles  
Liferaft compartment below helm seat  
Emergency tiller  
SS aft pulpit w/aft pulpit opening lifelines and horseshoe buoy holder  
Stern light on pulpit  
Flagpole and holder  
Teak-slatted bathing platform  
Removable SS bathing ladder  
Cockpit shower

### SPARS / RIGGING

Sparcraft Racing 9/10 fractional keel-stepped tapered mast in anodized aluminum w/two sets of aft-swept spreaders  
Anodized aluminum boom  
Spinnaker poletrack on mast  
Mast step fitting with 11 Lewmar blocks  
Stainless standing rigging  
Backstay adjuster  
Boom vang

### RUNNING RIGGING

(1) Mainsail halyard  
(1) Vectran genoa halyard  
Polyester mainsheet  
(2) Genoa sheets  
(2) Reefing lines  
(1) Outhaul line, vang line

### SAILS

Sails not included

### SALON

**STARBOARD:**  
Headroom 6'8"  
U-shaped settee with cushions and back rests  
Lockers above the seat-backs  
Storage under the settee  
Bar in settee back rest to starboard  
(2) Lewmar opening hatches with blinds  
(2) Opening ports  
(2) Fixed hull ports  
Grabrails with built-in blinds  
Salon table with wood inlay and bar  
(4) Overhead halogen lights  
Adjustable double hinged settee

### PORTSIDE:

(2) fixed ports  
(2) hatches with rolling blinds  
Opening port with blind on coachroof  
Large storage cabinet with 3 doors, drawers and shelving  
Additional storage above cabinet

### NAV STATION

Headroom 6'7"  
Large varnished chart table  
Storage  
Bookshelf  
(1) Lewmar opening port  
Pigeon hole storage compartments  
Electrical panel  
Radio & CD player

### GALLEY

Headroom 6'5"  
Double SS rectangular sinks with mixer tap pressurized hot and cold water  
Gimballed 2-burner LPG stove w/oven  
Laminated counter top  
12 volt electric refrigerator w/basket for storage  
Cutlery drawer  
Trash can  
Storage compartments with doors  
(2) Overhead lights  
Dust pan in the floor  
(1) Lewmar opening port

### AFT HEAD

Headroom 6'9"  
Fully molded head compartment with USCG approved marine toilet & holding tank  
Round FRP washbasin w/mixer tap, pressurized hot and cold shower  
Locker with door  
12v sump pump for shower  
Towel rails and accessories  
Overhead light  
Lewmar opening hatches

### FORWARD CABIN

Headroom 6'3"  
Double side berth  
Storage under berth  
Portside settee  
Shelves alongside hull  
Hanging locker  
Opening Lewmar deck hatch  
Halogen reading lights  
Ceiling lights

### FORWARD HEAD

Fully molded head compartment with USCG approved marine toilet and holding tank  
Round SS FRP wash basin w/mixer tap, pressurized hot and cold shower.  
Locker with door  
12v sump pump for shower  
Towel rails and accessories  
Overhead light  
Lewmar opening hatches

### AFT CABINS

Headroom: 6'8"  
Double berth with foam mattress  
Hanging locker  
Locker along the hull  
Storage space under berth  
Storage shelves at head of bed  
Overhead light  
Reading light  
(1) Lewmar port opening into the cockpit  
(1) Lewmar port opening into the cabin side

### PLUMBING

Electric bilge pump  
Hand- operated bilge pump  
105 gals fresh water capacity  
Pressurized water system with expansion tank  
12v sump pump for shower  
Flush thru hulls

### ELECTRICITY & LIGHTING

12 volt circuit  
1 x 110 amp battery - engine  
2x140A amp battery - house  
16-function electrical panel  
Navigation lights  
110v shore power  
110v battery charger (20 amp)

### ENGINE EQUIPMENT

53 gallon fuel tank  
Engine compartment soundproofed & insulated to USCG standards  
Engine 40 h.p. Volvo 2040 sail drive  
STD option D255 volvo 55Hp  
Saildrive  
Two-blade fixed propeller  
Hour meter and fuel gauge

### MISCELLANEOUS

Maintenance kit  
(2) Winch handles  
Owner's record and handbook  
STD mast : 2 spreaders + 1x19 cable rigging  
Race 1 : 2 spreaders + dyform rigging  
Race2 : 3 spreaders + rod rigging

### CLUB RACING PACK (Optional)

### CLUB RACING GEAR I

2 Spreader Tapered Mast-Dyform  
Standing Rigging  
Hydraulic Backstay Adjuster  
Tuff Luff Forestay

### CLUB RACING GEAR U.S.

2 Spreader Tapered Mast-Dyform  
Standing Rigging  
Hydraulic Backstay Adjuster  
ProFurl Genoa Furler with Split Drum